



APCO




EXTERIOR

◆ Colour Collection ◆

APCO 

# EXTERIOR

*Colour Collection*



White Gold



Sheer Ice



River Sand



December Frost



Clay



Raining Grey



Banyan Grove



Tea Leaf



Ripe Olive



Washed Steps



Window View




Grey Cloud



Beach Comber



Song of Nature




Whispering Smoke




Clear Sky Night


# Exterior Colour Collection

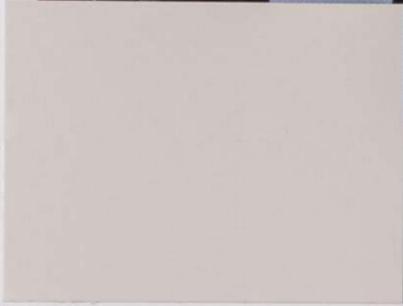

Silver Mine

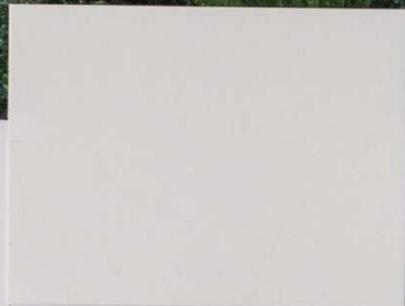

Iceland

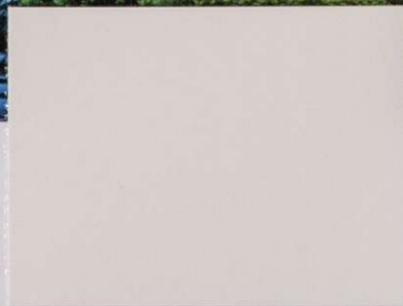

Pristine Linen



Creamy Crust



Grains of Sand



Burnt Metal



On the Rocks



Red Wood



Digital Grey



Wooden Chest



Almond Sand



Wild West




Natural Cream



Basra Pearl-N




Grape Juice

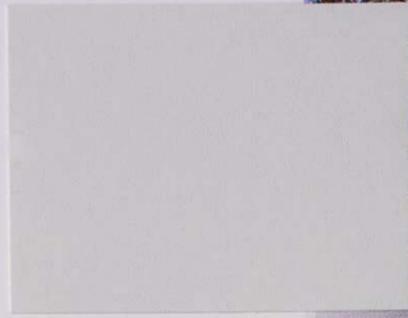

First Frost



Smoky Grey

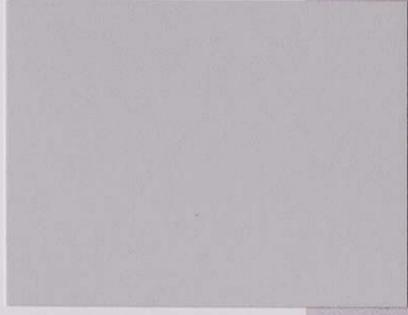


Quicksilver



Pastel Grey




Cold Flint

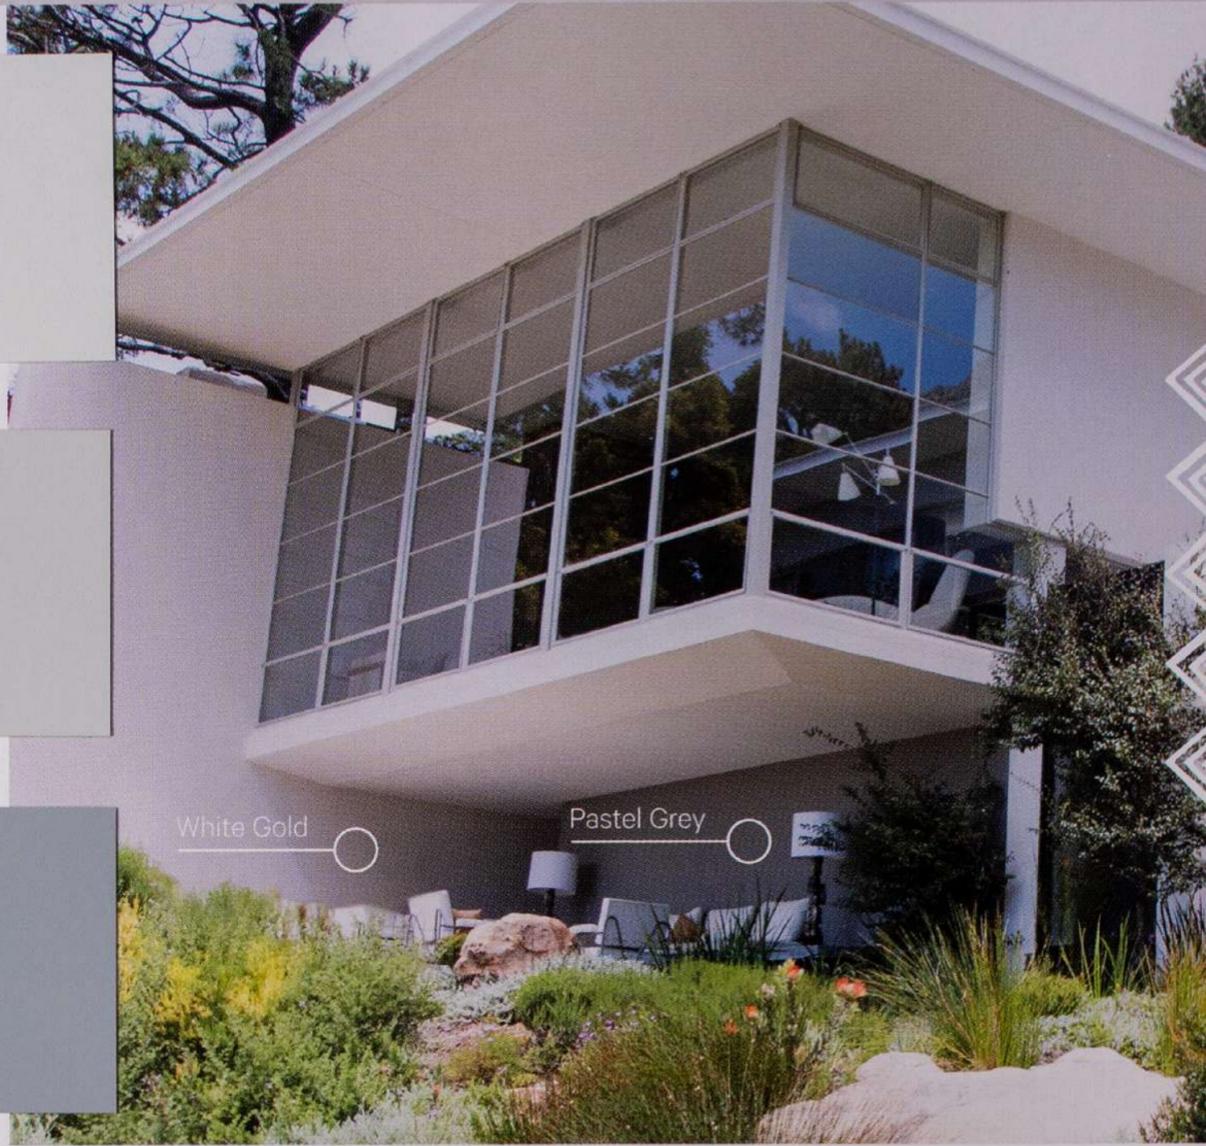

White Gold

Pastel Grey

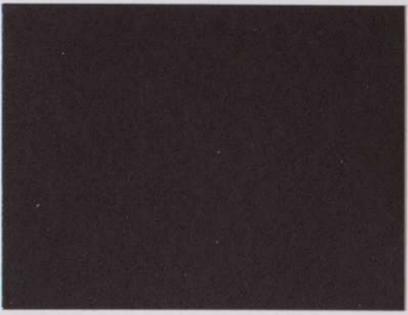

Burnt Malt



Whale Cove



Thicket



Emphasis



Whale Cove

White Gold

Sensibility



Voltage




Ink Grey




Sensibility



Bali Blue

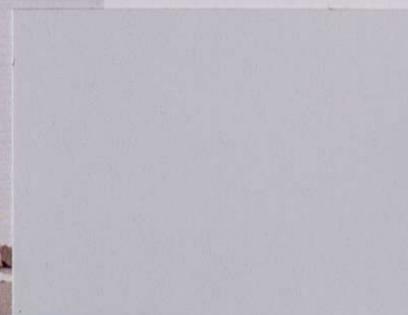

Cool Crystal-N

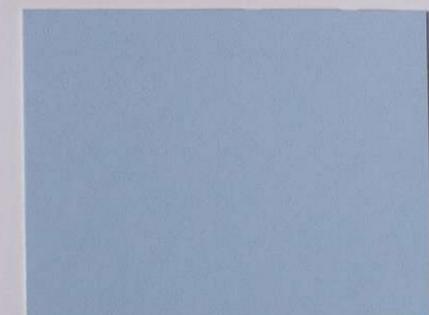

Featehr Blue

# Exterior Painting System


## Surface Preparation

Ensure that the surface to be painted is free from loose paint, dust, grease and algae, by vigorous wire brushing and cleaning with water, followed by a coat of an effective bio-wash solution.



## Surface Smoothing / Crack Filling

Walls may have slight irregularities and imperfections such as holes, dents and cracks. Apco Wall Putty is recommended to level minor undulations and smoothens the cracks up to 1.5mm for both interior and exterior masonry surface. Larger cracks can be filled by mixture of white cement or sand (In ratio of 1:3)

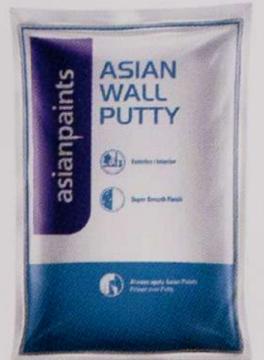

## Primer Coat

Before application of the topcoat, it is necessary to apply a coat of an exterior durable primer for a better adhesion and to increase durability of the paint. Apco SurePrep, an alkali, resistant primer-cum-sealer is specifically designed for application on both fresh alkali substrate and repainting jobs.



## Top Coat

Apply 2 to 3 coats of Apco Villa Sunfast. Ensure a gap of 3-4 hours between the coats. Apply a third coat on horizontal surface for additional protection.



## Paint Calculator

The amount of paint you will need will vary according to the paint as well as the condition of surface. This chart will help give you a reasonable estimate and is based on two coats of paint and 12 sq. m per litre coverage. Don't forget to reduce the surface area to be painted if area includes large windows and doors.

		DISTANCE AROUND THE ROOM (M)							
		10	12	14	16	18	20	22	24
WALL HEIGHT (M)	2.2	4L	4L	5L	6L	7L	7L	8L	9L
	2.5	4L	5L	6L	7L	8L	8L	9L	10L
	2.8	5L	6L	7L	7L	8L	9L	10L	11L
	3.1	5L	6L	7L	8L	9L	10L	11L	12L
	3.4	6L	7L	8L	9L	10L	11L	12L	14L
	3.7	6L	7L	9L	10L	11L	12L	14L	15L

# Colour Stay Technology

## Apco Villa Sunfast

Comes with a unique Colour Stay technology, which ensures long lasting colour on your exterior walls and Anti-Algal Formula which ensures your walls remain clean and continue to look fresh for a long time.



Apco Villa Sunfast, the most advanced exterior emulsion that you can gift your dream home.



Colour Stay Technology



High Sheen



Anti-Algal Formula



Dust Pick-Up Resistance



15 Year Warranty\*

\*Conditions apply. Please refer to the Apco Coatings Exterior Painting System Product and Warranty Guide for more details.

## Special Precautions

1. Do not apply when ambient temperature is less than 10°C, or if temperature might drop to this level within 4 hours of application.
2. Freshly Plastered surfaces must be allowed to cure completely before painting.
3. The paint should not be applied on surfaces / substrates which are subjected to continuous seepage or dampness.
4. Application of an Exterior Primer is mandatory for all surfaces.

**APCO**  
BRILLIANT PAINTS, BRILLIANT COLOURS

FIJI  
LAUTOKA  
Tel +679 666 2799  
contact.fiji@apcoatings.com

SOLOMON ISLANDS  
HONIARA  
Tel +677 30485  
contact.solomonislands@apcoatings.com

SUVA  
Tel +679 337 1268  
contact.fiji@apcoatings.com

TONGA  
NUKU'ALOFA  
Tel +676 24322  
contact.tonga@apcoatings.com

VANUATU  
PORT VILA  
Tel +678 25968  
contact.vanuatu@apcoatings.com

AUSTRALIA  
SYDNEY  
Tel+ 61 2 9832 0000  
info@apcoatings.com.au

[www.apcoatings.com](http://www.apcoatings.com)

NEW ZEALAND  
AUCKLAND  
Tel + 64 9 6364 3091  
contact.newzealand@apcoatings.com

