

Luxe Ceiling Flat

Luxe ceiling flat is bright white premium quality flat emulsion paint for ceilings.



PRODUCT BENEFITS

Stain Guard:

Luxe Ceiling Flat Acrylic emulsion has been fortified with Stain Guard technology that guards your walls against most household stains and ensures

Excellent Opacity:

Product is designed for excellent opacity which hides the surface effectively.

Long lasting film:


Luxe Ceiling Flat Acrylic Emulsion has a long lasting film that keeps your house as good as new for a long time.

Fungus and mildew resistance:

Luxe Ceiling Flat Acrylic Emulsion is designed to protect your walls against unwanted fungus that can cause considerable damage.

Sheen:

Rich Matt finish




LEAD FREE* GUARANTEE

** All Asian Paints products do not contain intentionally added Lead, Mercury, Arsenic or Chromium.



PRODUCT FEATURES

AVAILABLE PACKS

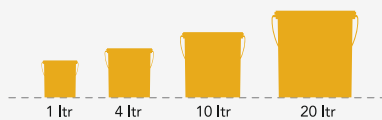

COVERAGE



Coverage 12-14 sqm/ltr**

Actual coverage may vary from the quoted coverage due to factors such as method & condition of application and surface roughness and porosity.

AREAS OF APPLICATION



Wallboard, drywall, concrete, plaster, cement render, paper faced plaster board, timber and hardboard

HOW TO APPLY

SURFACE PREPARATION



PLASTER

New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces.



CLEANING

Surface should be free from any loose paint, dust or grease. Growths of fungus, algae or moss should be removed by wire brushing and water.



FILLING FOR CRACKS

For filling cracks use APCO Interior/Exterior wall putty or Cement sand mixture in 1:3 proportion.

APPLICATION PROCESS

STEP 1

Stir Paint Well In A Circular Lifting Motion For 5 Minutes Before Use With A Broad Flat Paddle. Apply One Coat Of Apco Sureprep Int/ext Primer And Two Coats Of Luxe Ceiling Flat Topcoat By Using A Good Quality Brush And Roller Sleeve.

STEP 2

Use APCO GIB board sealer for GIB boards instead of APCO Sureprep Int/ext primer. Extra coats may be required for application by brush only. It is also important to avoid using poor quality or worn rollers and brushes as they can adversely affect the final finish.

ADDITIONAL INFORMATION

DRYING TIME

TOUCH DRY



30
MINUTES

Gloss level @ 60°:

Flat - 0 - 5

Method of application: Brush, Roller and Spray

Flamability: Non-flammable

RECOAT



3-4 hours
Recoat

VOC CONTENT



Low VOC***
No Harmful Chemicals****

The Green Assure products have been designated by Asian Paints to be environmentally Preferable.

***VOCs are less than 100g/l. Colorants will add additional VOCs.

**** No intentionally added CMRs, Heavy Metals or APEOs.

SAFETY PRECAUTION

- > Do not apply when surface temperature is below 10 degree C
- > Provide adequate ventilation during use.
- > Keep out of reach of children.
- > Check cross cut adhesion of old paint before repainting.
- > In normal condition, a week's curing is required to develop full hardness & resistance properties.
- > Avoid exposure of new paint film to steam for 48 hours and to washing and scrubbing for 7 days.

SAFETY INFORMATION

- > If swallowed give water to dilute. Do not induce vomiting. Get medical attention.
- > EYES: Hold open and flush with running water for at least 15 minutes.
- > Skin: Remove contaminated clothes and wash skin thoroughly with soap and water.
- > Inhalation: Remove to fresh air. If any symptoms persist, seek prompt medical attention.
- > Do not pour left over paint down the drain or water courses.
- > In the event of spill, contain spillage with help of sand, dust or earth.
- > No Added lead, chromium or mercury compounds.
- > Left over paint disposal: Leftover paint/drums should not be disposed in soil/drains.
Consumers should consult a local recycling agency for proper disposal of paints/drums.