

Villa Sunfast Protek Topcoat

Villa Sunfast is an ultra premium quality highly durable exterior painting system keeping the walls protected from problems like dampness, algae, cracks and colour fading. It comes with 15 and 5 year durability and waterproofing warranty.



WATER BASED

PRODUCT BENEFITS

Warranty:

15 year durability and 5 year waterproofing warranty.

Superior cleanability:

Better ease to clean rust, dirt streaks and bird droppings ensuring your walls look fresh for longer period of time.

Effective Waterproofing:

The superlative waterproofing capabilities of the Villa Sunfast Protek system forms an effective barrier against water penetration.

Crack Bridging:

Significantly higher elongation and comes with unique fibre reinforcement thereby offering a unique crack bridging ability of upto 2mm.

Structural Protection:

Villa Sunfast Protek system has excellent CO₂ diffusion (carbonation) resistance & prevents the corrosion of rebar within the concrete matrix, leading to superior structural protection.

Environmentally responsible:


This product is formulated without carcinogens, heavy metals (lead, mercury, arsenic, chromium, cadmium, arsenic) and Alkylphenol Ethoxylates (APEOs), and complies with the VOC limits specified in international standards.

PRODUCT FEATURES

AVAILABLE PACKS



COVERAGE

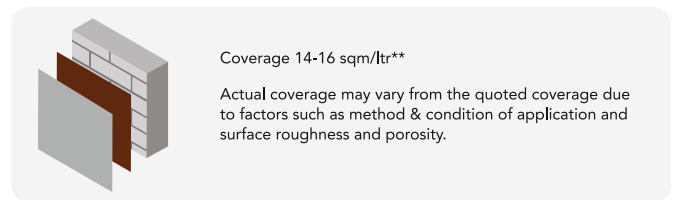

AREAS OF APPLICATION



Bare timber, masonry, weatherboards, plaster, concrete blocks, brickwork, cement render, wallboard PVC and cement sheets. Though designed primarily for exterior use, it may also be used inside in areas prone to high wear.

HOW TO APPLY

SURFACE PREPARATION



PLASTER

New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces.



CLEANING

Surface should be free from any loose paint, dust or grease. Growths of fungus, algae or moss should be removed by wire brushing and water.



FILLING FOR CRACKS

For filling cracks use APCO Interior/Exterior wall putty or Cement sand mixture in 1:3 proportion.

APPLICATION PROCESS

STEP 1

Stir paint well in a circular lifting motion for 5 minutes before use with a broad flat paddle. Apply two coat of Villa Sunfast Protek Basecoat and two coats of Villa Sunfast Protek Topcoat by using a good quality brush and roller sleeve.

STEP 2

Extra coats may be required for application by brush only. It is also important to avoid using poor quality or worn rollers and brushes as they can adversely affect the final finish.

ADDITIONAL INFORMATION

DRYING TIME

TOUCH DRY



30
MINUTES

Gloss level @ 60°:

Gloss - 65 - 75 unit

Semi-Gloss - 25-35 Unit

Low Sheen - 8-12 unit

RECOAT



4 hours
Recoat

SAFETY PRECAUTION

- > Do not apply when surface temperature is below 10 degree C.
- > Provide adequate ventilation during use.
- > Keep out of reach of children.
- > Check cross cut adhesion of old paint before repainting.
- > In normal condition, a week's curing is required to develop full hardness & resistance properties.
- > Avoid exposure of new paint film to steam for 48 hours and to washing and scrubbing for 7 days.

SAFETY INFORMATION

- > If swallowed give water to dilute. Do not induce vomiting. Get medical attention.
- > EYES: Hold open and flush with running water for at least 15 minutes.
- > Skin: Remove contaminated clothes and wash skin thoroughly with soap and water.
- > Inhalation: Remove to fresh air. If any symptoms persist, seek prompt medical attention.
- > Do not pour left over paint down the drain or water courses.
- > In the event of spill, contain spillage with help of sand, dust or earth.
- > No Added lead, chromium or mercury compounds.
- > Left over paint disposal: Leftover paint/drums should not be disposed in soil/drains.
Consumers should consult a local recycling agency for proper disposal of paints/drums.