

Decotrade Gloss Enamel

Decotrade gloss Enamel is classic oil based professional range enamel designed for high traffic areas. Suitable for all interior and exterior timber, masonry and metal applications where a durable finish is desired.



 OIL BASED

PRODUCT BENEFITS

Gloss Finish:

Imparts a long lasting glossy finish to your wood, metal and masonry surfaces, keeping them looking like new for longer.

Durability:


Consistent and assured quality that gives you a durable finish.

Stain Guard:

Superior stain resistance & easy to wash features help you remove stains easily.

PRODUCT FEATURES

AVAILABLE PACKS

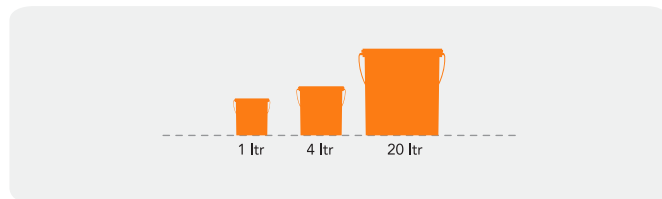

COVERAGE



Coverage 14-16 sqm/ltr**

Actual coverage may vary from the quoted coverage due to factors such as method & condition of application and surface roughness and porosity.

AREAS OF APPLICATION



Interior and exterior primed timber, masonry and metal surfaces. Ideal finish for doors, windows, wrought iron furniture, exterior trimmings and fittings.

HOW TO APPLY

SURFACE PREPARATION

Remove all dirt, dust, grease and other contaminants. If some mould or fungus is present on the surface, wash it with a commercially available bleaching agent and then treat with antifungal solution. Fill cracks and imperfections with a suitable filler and spot prime.

APPLICATION PROCESS

STEP 1

Stir the contents thoroughly before and during use. Apply uniformly, after proper surface preparation and suitable priming. For sound painted surfaces apply one coat of Deco trade Alkyd undercoat followed by two coats of Decotrade gloss Enamel.

STEP 2

For bare cement render/brick and masonry apply one coat of Deco trade alkyd undercoat followed by two coats of Decotrade gloss Enamel. For new timber and allied substrates apply NoFrills Wood pink Primer followed by one coat of Decotrade alkyd undercoat and finish with two coats of Decotrade Gloss Enamel.

STEP 3

For weathered galvanised iron and zinc alumina, apply Metalprep Int/ext Primer followed by two coats of Decotrade gloss Enamel. For bare steel in good condition no primer is required, if required apply one coat of Metalprep Int/ext enamel primer. Finish with two coats of Decotrade gloss enamel. For bare steel in poor condition apply Metalprep enamel primer followed by two coats of Decotrade gloss Enamel.

ADDITIONAL INFORMATION

DRYING TIME

TOUCH DRY  **4**
HOURS

Gloss level @ 60°:

Gloss - 85-100 Unit

Method of application: Brush, Roller and Spray

Highly flammable, Dangerous goods class 3.2, Flash point 32°C UN 1263, PG III.

RECOAT

 +  **16** hours
Recoat

SAFETY PRECAUTION

- > Do not apply when surface temperature is below 10 degree C.
- > Provide adequate ventilation during use.
- > Keep out of reach of children.
- > Check cross cut adhesion of old paint before repainting.
- > Under normal conditions a week's curing is required to develop full hardness & resistance properties.

SAFETY INFORMATION

- > If swallowed give water to dilute. Do not induce vomiting. Get medical attention.
- > EYES: Hold open and flush with running water for at least 15 minutes.
- > Skin: Remove contaminated clothes and wash skin thoroughly with soap and water.
- > Inhalation: Remove to fresh air. If any symptoms persist, seek prompt medical attention.
- > Do not pour left over paint down the drain or water courses.
- > In the event of spill, contain spillage with help of sand, dust or earth.
- > No Added lead, chromium or mercury compounds.
- > Left over paint disposal: Leftover paint/drums should not be disposed in soil/drains.
Consumers should consult a local recycling agency for proper disposal of paints/drums.
Thinner / Cleanup - Enamel Thinner