

## Endure Gloss Enamel

Endure Gloss Enamel imparts a shiny new look to surfaces painted with this finish. It forms a tough film that is highly resistant to household stains. It thereby serves as a protective armour around the painted surface.

### PRODUCT BENEFITS

**Gloss Finish:**

Gives a mirror like gloss for your walls, doors, windows, grills & gates.

**Tough & Durable:**

The oil based film makes it one of the toughest & durable paints that forms a protective armour around surfaces.


**Stain Guard:**

Superior stain resistance & easy to wash features help you remove stains easily.




### PRODUCT FEATURES

#### AVAILABLE PACKS

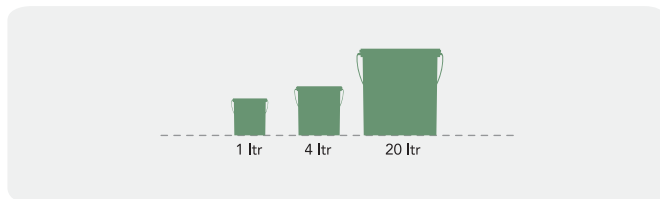

#### COVERAGE

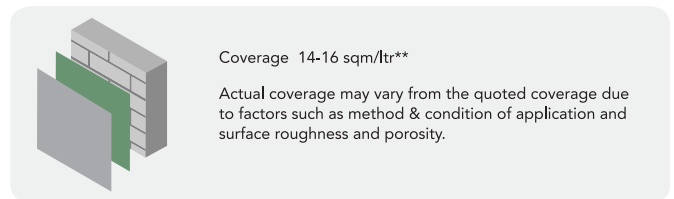

#### AREAS OF APPLICATION



Interior and exterior primed timber, masonry and metal surfaces. Ideal finish for doors, windows, wrought iron furniture, exterior trimmings and fittings.

### HOW TO APPLY

#### SURFACE PREPARATION

Remove all dirt, dust, grease and other contaminants. If some mould or fungus is present on the surface, wash it with a commercially available bleaching agent and then treat with antifungal solution. Fill cracks and imperfections with a suitable filler and spot prime.

#### APPLICATION PROCESS

STEP 1

Stir the contents thoroughly before and during use. Apply uniformly, after proper surface preparation and suitable priming. For sound painted surfaces apply one coat of Oilprep Enamel Alkyd undercoat followed by two coats of Endure Gloss enamel.

STEP 2

For bare cement render/brick and masonry apply one coat of Oilprep Enamel Alkyd undercoat followed by two coats of Endure Gloss enamel. For new timber and allied substrates apply Oilprep Wood Primer Pink followed by one coat of Oilprep Enamel Alkyd undercoat. Finish with two coats of Endure gloss enamel

STEP 3

For bare steel in good condition no primer is required, if required apply one coat of Metalprep enamel primer. Finish with two coats of Endure gloss enamel. For bare steel in poor condition apply Metalprep enamel primer followed by two coats of Endure gloss enamel

## ADDITIONAL INFORMATION

### DRYING TIME

TOUCH DRY  **4**  
HOURS

Gloss level @ 60°:

Gloss - 85-100 Unit

Semi Gloss- 25-35 unit

Method of application: Brush, Roller and Spray

Highly flammable, Dangerous goods class 3.2, Flash point 32°C UN 1263, PG III.

### RECOAT

 +  **16** hours  
Recoat

### SAFETY PRECAUTION

- > Do not apply when surface temperature is below 10 degree C.
- > Provide adequate ventilation during use.
- > Keep out of reach of children.
- > Check cross cut adhesion of old paint before repainting.
- > Under normal conditions a week's curing is required to develop full hardness & resistance properties.

### SAFETY INFORMATION

- > If swallowed give water to dilute. Do not induce vomiting. Get medical attention.
- > EYES: Hold open and flush with running water for at least 15 minutes.
- > Skin: Remove contaminated clothes and wash skin thoroughly with soap and water.
- > Inhalation: Remove to fresh air. If any symptoms persist, seek prompt medical attention.
- > Do not pour left over paint down the drain or water courses.
- > In the event of spill, contain spillage with help of sand, dust or earth.
- > No Added lead, chromium or mercury compounds.
- > Left over paint disposal: Leftover paint/drums should not be disposed in soil/drains.  
Consumers should consult a local recycling agency for proper disposal of paints/drums.  
Thinner / Cleanup - Enamel Thinner