

Metalprep Enamel Primer

Metalprep enamel primer is a primer that can be used as an undercoat on iron-based surfaces. Its strong adhesion and good rust protection gives you the assurance of a rust-free living space.



OIL BASED

PRODUCT BENEFITS

Good corrosion resistance:

Based on synthetic resins and contains corrosion inhibiting pigments.

Easy to apply:


Easily applied by brush or spray.

Good adherent coating:


Dries hard to form a good adherent coating.

PRODUCT FEATURES

AVAILABLE PACKS

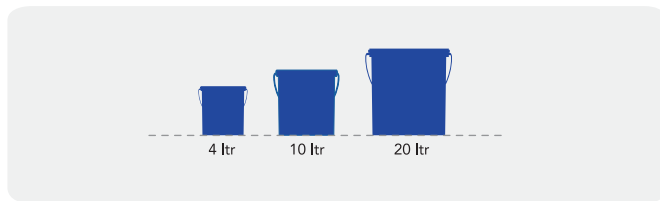

COVERAGE

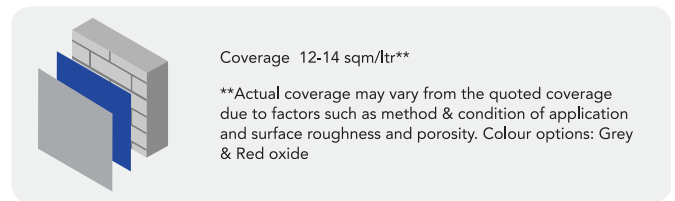

AREAS OF APPLICATION



All bare iron and steel surface and rust affected areas of galvanized iron. (Do not use as a general treatment for galvanized iron)

HOW TO APPLY

SURFACE PREPARATION

Remove all dirt, dust, grease and other contaminants. If some mould or fungus is present on the surface, wash it with a commercially available bleaching agent and then treat with antifungal solution. Fill cracks and imperfections with a suitable filler and spot prime.

APPLICATION PROCESS

STEP 1

Remove rust by sand papering or wire brushing. Remove dirt, oil and grease. Ensure surface is thoroughly clean and dry before painting.

STEP 2

Stir paint with a 25mm wide flat stirrer in a circular lifting motion for at least 5 minutes before use. Apply one coat by brush, roller or spray followed by one Oilprep enamel undercoat with two coats of top coat finish.

ADDITIONAL INFORMATION

DRYING TIME



Gloss level @ 60°:

Matt - 0 - 5 Unit

Method of application: Brush, Roller and Spray

Highly flammable, Dangerous goods class 3.2, Flash point 32°C UN 1263, PG III.

RECOAT



SAFETY PRECAUTION

- > Do not apply when surface temperature is below 10 degree C.
- > Provide adequate ventilation during use.
- > Keep out of reach of children.
- > Check cross cut adhesion of old paint before repainting.
- > Under normal conditions a week's curing is required to develop full hardness & resistance properties.

SAFETY INFORMATION

- > If swallowed give water to dilute. Do not induce vomiting. Get medical attention.
- > EYES: Hold open and flush with running water for at least 15 minutes.
- > Skin: Remove contaminated clothes and wash skin thoroughly with soap and water.
- > Inhalation: Remove to fresh air. If any symptoms persist, seek prompt medical attention.
- > Do not pour left over paint down the drain or water courses.
- > In the event of spill, contain spillage with help of sand, dust or earth.
- > No Added lead, chromium or mercury compounds.
- > Left over paint disposal: Leftover paint/drums should not be disposed in soil/drains.
Consumers should consult a local recycling agency for proper disposal of paints/drums.
Thinner / Cleanup - Enamel Thinner