

Oilprep Enamel Undercoat

Oilprep enamel undercoat is premium quality oil based undercoat for all types of timber, metal, masonry substrates.



 OIL BASED

PRODUCT BENEFITS

Easy Sanding:

High PVC formula makes it easy to sand.

Good adherent coating:


Dries hard to form good adherent coating on substrate.

Intercoat adhesion:


Excellent intercoat adhesion with oil as well as water based coatings.

PRODUCT FEATURES

AVAILABLE PACKS

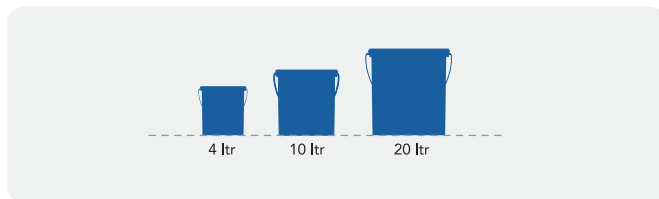

COVERAGE

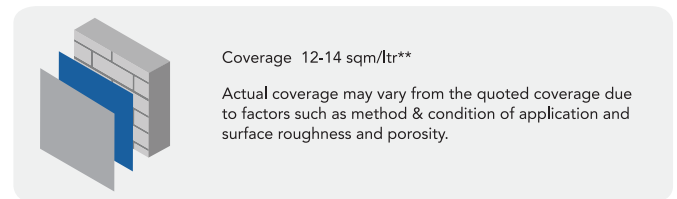

AREAS OF APPLICATION



All timber and metal surfaces, plywood, Gibb-board and hardboard.

HOW TO APPLY

SURFACE PREPARATION

Remove all dirt, dust, grease and other contaminants. If some mould or fungus is present on the surface, wash it with a commercially available bleaching agent and then treat with antifungal solution. Fill cracks and imperfections with a suitable filler and spot prime.

APPLICATION PROCESS

STEP 1

For sound painted surfaces apply one coat of Oilprep enamel alkyd undercoat followed by two coats suitable finish paint. For unsound painted surfaces remove loose and flaking paint and apply one coat of Oilprep enamel undercoat and finish with suitable top coats.

STEP 2

For timber, plyboard/hardboard and mesonite board apply one coat of Oilprep wood pink primer and apply one coat of Oilprep enamel undercoat and finish with two coats suitable top coats. For bare steel in good condition apply one coat of Oilprep enamel undercoat followed by two coats of suitable top coats

ADDITIONAL INFORMATION

DRYING TIME

TOUCH DRY



20
MINUTES

Gloss level @ 60°:

Matt - 0 - 5 Unit

Method of application: Brush, Roller and Spray

Highly flammable, Dangerous goods class 3.2, Flash point 32°C UN 1263, PG III.

RECOAT



6 hours
Recoat

SAFETY PRECAUTION

- > Do not apply when surface temperature is below 10 degree C.
- > Provide adequate ventilation during use.
- > Keep out of reach of children.
- > Check cross cut adhesion of old paint before repainting.
- > Under normal conditions a week's curing is required to develop full hardness & resistance properties.

SAFETY INFORMATION

- > If swallowed give water to dilute. Do not induce vomiting. Get medical attention.
- > EYES: Hold open and flush with running water for at least 15 minutes.
- > Skin: Remove contaminated clothes and wash skin thoroughly with soap and water.
- > Inhalation: Remove to fresh air. If any symptoms persist, seek prompt medical attention.
- > Do not pour left over paint down the drain or water courses.
- > In the event of spill, contain spillage with help of sand, dust or earth.
- > No Added lead, chromium or mercury compounds.
- > Left over paint disposal: Leftover paint/drums should not be disposed in soil/drains.
Consumers should consult a local recycling agency for proper disposal of paints/drums.
Thinner / Cleanup - Enamel Thinner