

RapidPave Acrylic Paving Paint

Rapidpave water based acrylic paving paint has been designed for exterior and interior application.



PRODUCT BENEFITS


- Ecofriendly
- Anti- Slippery
- Good Dirt Pick Up Resistance

PRODUCT FEATURES

AVAILABLE PACKS



COVERAGE

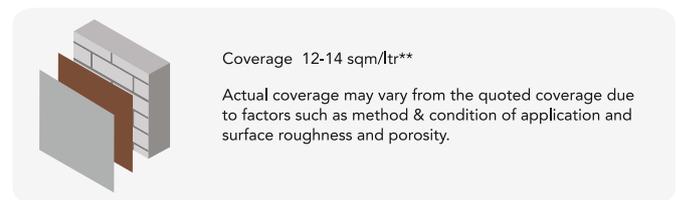

AREAS OF APPLICATION



Concrete surfaces, Composite board, Particleboard, Timber and Metal surfaces.

HOW TO APPLY

SURFACE PREPARATION

Previously Unpainted Concrete Floors - Smooth bare concrete must be acid etched. Flush the surface with sufficient fresh water to remove acid traces. Allow complete drying of surface for 3-4 days. Previously painted surface shall be subjected to thorough removal of loose & flaking paint. Previously unpainted timber floors should be sanded thoroughly and wiped clean. Fill the nail holes and cracks before painting. Ensure that surface is clean, dry and free from release agents, oils, grease, efflorescence.

APPLICATION PROCESS

Stir the contents thoroughly before and during application. When applying over an unknown coating, test adhesion and compatibility of the product on a small test area. New concrete / cement floors must be acid etched followed by thorough water wash. Apply first coat with 10-15% thinning to facilitate more penetration to the surface, then apply two coats of Rapidpave Acrylic Paving Paint. For unsound concrete surfaces, first strip off old paint then apply one coat of Sureprep Interior/Exterior Acrylic Sealer Undercoat followed by two coats of Rapidpave Acrylic Paving Paint. For timber, particleboard and composite board apply one coat of Oilprep Interior/Exterior Wood Primer followed by two coats of water based Rapidpave Acrylic Paving Paint. For galvanized iron apply one coat of APCO AP 10 Etch primer followed by two coats of Rapidpave Acrylic Paving Paint.

ADDITIONAL INFORMATION

DRYING TIME



Gloss level @ 60°:

Gloss - >20 unit

Method of application: Brush, Roller and Spray

RECOAT



SAFETY PRECAUTION

- > Do not apply when surface temperature is below 10°C.
- > Provide adequate ventilation during use.
- > Keep out of reach of children.
- > Check cross cut adhesion of old paint before repainting.
- > Under normal conditions a week's curing is required to develop full hardness & resistance properties.

SAFETY INFORMATION

- > If swallowed give water to dilute. Do not induce vomiting. Get medical attention.
- > EYES: Hold open and flush with running water for at least 15 minutes.
- > Skin: Remove contaminated clothes and wash skin thoroughly with soap and water.
- > Inhalation: Remove to fresh air. If any symptoms persist, seek prompt medical attention.
- > Thinner / Cleanup - Water. Though product is designed for undiluted application, it may be thinned up to 10% if necessary.