

Timbercare Alkyd Clear

Alkyd clear is premium quality alkyd based clear finish having excellent flow and leveling properties. It is single pack easy to use clear finish which enhances beauty of wood.




PRODUCT BENEFITS


- High Gloss
- Excellent flow and leveling
- Non yellowing film

PRODUCT FEATURES

AVAILABLE PACKS

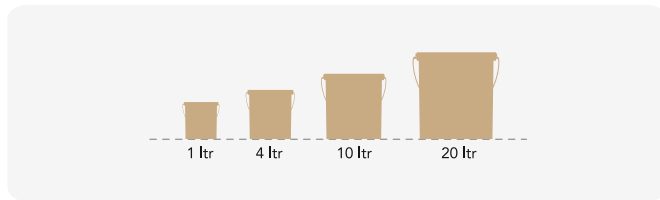

COVERAGE

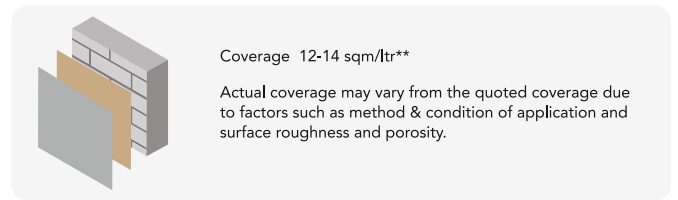

AREAS OF APPLICATION



Dressed timber furniture, doors, veneers, wall panelling etc

HOW TO APPLY

SURFACE PREPARATION

Ensure that timber to be painted is clean and dry. Remove all wax, grease and oil by cleaning with thinner. Carry out sanding along the grain marks using fine sand paper. Dust off entire area to be painted. Fill surface imperfections like nail holes and cracks etc by suitable filler. Sand smooth surface using fine sand paper and dust off.

APPLICATION PROCESS

For better finish on new timber surfaces, apply one or two coats of Timbercare Brushable sanding sealer before application of this product.

On previously varnished surfaces, apply one or two coats of Alkyd clear with minimum 16 hrs recoating interval. Light sanding between the coats with 320 mesh sandpaper is recommended.

Caution: Allow enough time for proper curing of paint film. Always carry out sanding of wooden surfaces along the grain marks. Use only the recommended thinner for dilution and cleaning.

ADDITIONAL INFORMATION

DRYING TIME



Gloss @ 60°:

Gloss - min 85 unit

Method of application: Brush and Spray.

Highly flammable, Dangerous goods class 3.2, Flash point 32°C, UN 1263, PG III. HAZCHEM 3[Y]E

RECOAT



SAFETY PRECAUTION

- > Do not apply when surface temperature is below 10°C.
- > Provide adequate ventilation during use.
- > Keep out of reach of children.
- > Check cross cut adhesion of old paint before repainting.
- > Under normal conditions a week's curing is required to develop full hardness & resistance properties.

SAFETY INFORMATION

- > If swallowed give water to dilute. Do not induce vomiting. Get medical attention.
- > EYES: Hold open and flush with running water for at least 15 minutes.
- > Skin: Remove contaminated clothes and wash skin thoroughly with soap and water.
- > Inhalation: Remove to fresh air. If any symptoms persist, seek prompt medical attention.
- > Thinner / Cleanup - Thinner 600/Mineral turps. Though product is designed to be applied undiluted by brush, up to 10% thinner can be used for ease of application. For spraying, up to 30% thinner required depending on climatic condition.