

Timbercare ID Lacquer

ID lacquer is a nitrocellulose based clear lacquer with fast drying characteristics. Available in gloss, semi-gloss and matt finish.



PRODUCT BENEFITS


Instant dry

Tough and wear resistant finish


Enhances wood look

PRODUCT FEATURES

AVAILABLE PACKS

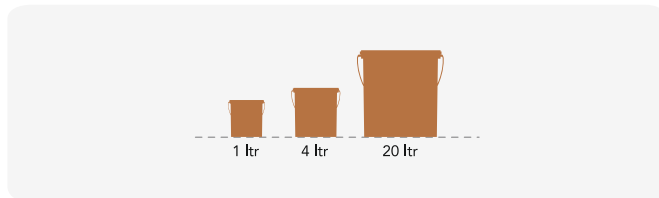

COVERAGE

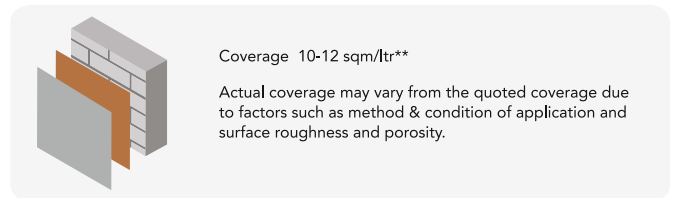

AREAS OF APPLICATION



Dressed timber furniture, doors, veneers, wall panelling etc, Ideal for furniture and cabinet making in production line joineries.

HOW TO APPLY

SURFACE PREPARATION

Ensure that timber to be painted is clean and dry. Remove all wax, grease and oil by cleaning with thinner. Carry out sanding along the grain marks using fine sand paper. Dust off entire area to be painted. Fill surface imperfections like nail holes and cracks etc by suitable filler. Sand smooth surface using fine sand paper and dust off.

APPLICATION PROCESS

On new surface apply one or two coats of Instant Drying Sanding Sealer by spray. Carry out light sanding after thorough drying and dust off the area.

Apply two uniform coats of Instant Drying Lacquer in desired finishes.

On previously applied surfaces, apply two uniform coats of Instant Drying Lacquer with minimum 30 minutes recoating interval. For toning of wood grains, transtain can be used appropriately prior to application of Instant Drying Sanding Sealer.

Caution: Allow enough time for proper curing of paint film. Always carry out sanding of wooden surfaces along the grain marks. Use always the recommended thinner for dilution and clean up. Ensure thorough mixing of Semigloss and matt finishes before taking up application.

ADDITIONAL INFORMATION

DRYING TIME

TOUCH DRY



5-10
MINUTES

Gloss @ 60°:

Gloss - min 85 unit

Semi-gloss - 20 -50 unit

Matt - 0 - 5 unit

Method of application: Spray only.

Highly flammable, Dangerous goods class 3.2, Flash point 32°C, UN 1263, PG III. HAZCHEM 3[Y]E

RECOAT



30 minutes
Recoat

SAFETY PRECAUTION

- > Do not apply when surface temperature is below 10°C.
- > Provide adequate ventilation during use.
- > Keep out of reach of children.
- > Check cross cut adhesion of old paint before repainting.
- > Under normal conditions a week's curing is required to develop full hardness & resistance properties.

SAFETY INFORMATION

- > If swallowed give water to dilute. Do not induce vomiting. Get medical attention.
- > EYES: Hold open and flush with running water for at least 15 minutes.
- > Skin: Remove contaminated clothes and wash skin thoroughly with soap and water.
- > Inhalation: Remove to fresh air. If any symptoms persist, seek prompt medical attention.
- > Thinner / Cleanup - ID Lacquer thinner. for spraying dilute up to 40% with ID lacquer thinner depending on climatic condition