

Timbercare ID Wood Sanding Sealer

Instant dry sanding sealer is high quality nitrocellulose based sanding sealer for application on interior woods.




PRODUCT BENEFITS


- Instant dry
- Easy sanding and smooth finish
- Ideal grain sealer
- Excellent adhesion to various woods

PRODUCT FEATURES

AVAILABLE PACKS

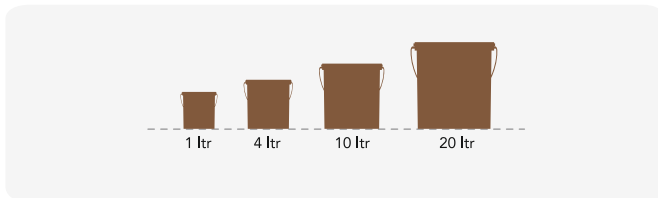

COVERAGE

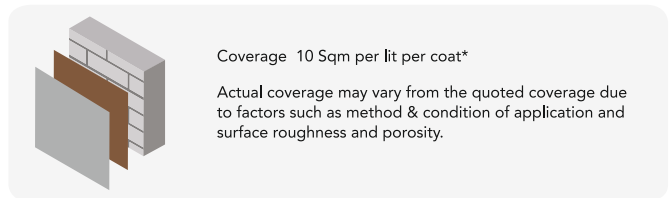

AREAS OF APPLICATION



Dressed timber furniture, doors, veneers, wall panelling etc, Ideal for furniture and cabinet making in production line joineries.

HOW TO APPLY

SURFACE PREPARATION

Ensure that timber to be painted is clean and dry. Remove all wax, grease and oil by cleaning with thinner. Carry out sanding along the grain marks using fine sand paper. Dust off entire area to be painted. Fill surface imperfections like nail holes and cracks etc by suitable filler. Sand smooth surface using fine sand paper and dust off.

APPLICATION PROCESS

Stir the contents thoroughly before and during use with a broad flat stirrer using an upward lifting action. On new surface, apply one coat of ID sanding sealer by spray and get desired finish. It may be sanded after three hours to get smooth finish using the sandpaper. Keep in mind the overcoat time (30 minutes). For spraying dilute with 50% thinner.

ADDITIONAL INFORMATION

DRYING TIME



Gloss @ 60°:

Matt - 0 - 5 units

Method of application: Spray only.

Highly flammable, Dangerous goods class 3.2, Flash point 32°C, UN 1263, PG III. HAZCHEM 3[Y]E

RECOAT



SAFETY PRECAUTION

- > Do not apply when surface temperature is below 10°C.
- > Provide adequate ventilation during use.
- > Keep out of reach of children.
- > Check cross cut adhesion of old paint before repainting.
- > Under normal conditions a week's curing is required to develop full hardness & resistance properties.

SAFETY INFORMATION

- > If swallowed give water to dilute. Do not induce vomiting. Get medical attention.
- > EYES: Hold open and flush with running water for at least 15 minutes.
- > Skin: Remove contaminated clothes and wash skin thoroughly with soap and water.
- > Inhalation: Remove to fresh air. If any symptoms persist, seek prompt medical attention.
- > Thinner / Cleanup - ID Lacquer thinner. for spraying dilute up to 50% with ID lacquer thinner depending on climatic condition