

## Timbercare Natural Oil Stain

Natural oil stain is an oleoresinous based timber stain in light fast weather resistant colours. It highlights the aesthetic beauty of wood grains and also protects the wood from rotting, fungi and insects by its combined moisture regulating action. This product is ideally suited for domestic and tropical woods.



### PRODUCT BENEFITS


- Semitransparent & penetrating
- Enhances wood grains
- Revitalises timber decks and weatherboards
- Protects timber from weathering

### PRODUCT FEATURES

#### AVAILABLE PACKS



#### COVERAGE

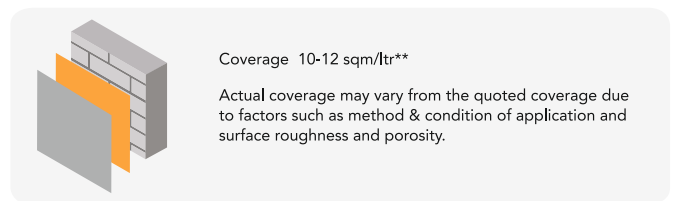

#### AREAS OF APPLICATION



Wooden houses, external claddings, roof underlays, windows, shutters, doors, fences and garden furniture.

### HOW TO APPLY

#### SURFACE PREPARATION

Ensure that timber to be painted is clean and dry. Remove all wax, grease and oil by cleaning with thinner. Carry out sanding along the grain marks using fine sand paper. Dust off entire area to be painted. Fill surface imperfections like nail holes and cracks etc by suitable filler. Sand smooth surface using fine sand paper and dust off.

#### APPLICATION PROCESS

Stir the contents thoroughly before and during use. No primer is required before application of this product. Apply two or three uniform coats of Natural Oil Stain by convenient method of application.

Caution: Allow enough time for proper curing of paint film. Always carry out sanding of wooden surfaces along wood grains. Use only recommended thinner for dilution and cleaning. Do not apply this product at excessively high film thickness.

### ADDITIONAL INFORMATION

#### DRYING TIME



Gloss @ 60°:

Matt - 0 - 5 unit

Method of application: Brush, Spray and Rag

Highly flammable, Dangerous goods class 3.2, Flash point 32°C, UN 1263, PG III. HAZCHEM 3[Y]E

#### RECOAT



## SAFETY PRECAUTION

---

- > Do not apply when surface temperature is below 10°C.
- > Provide adequate ventilation during use.
- > Keep out of reach of children.
- > Check cross cut adhesion of old paint before repainting.
- > Under normal conditions a week's curing is required to develop full hardness & resistance properties.

## SAFETY INFORMATION

---

- > If swallowed give water to dilute. Do not induce vomiting. Get medical attention.
- > EYES: Hold open and flush with running water for at least 15 minutes.
- > Skin: Remove contaminated clothes and wash skin thoroughly with soap and water.
- > Inhalation: Remove to fresh air. If any symptoms persist, seek prompt medical attention.
- > Thinner / Cleanup - Thinner 600/Mineral turps. Though product is designed to be applied undiluted.