

Timbercare Solid oil stain

Solid oil stain is an oleoresinous based timber stain which hides the wood grains. It offers effective protection to wood from rotting, fungi and insects.




PRODUCT BENEFITS


- Effective against fungi and insects
- Self priming
- Good penetration
- Good water repellency

PRODUCT FEATURES

AVAILABLE PACKS

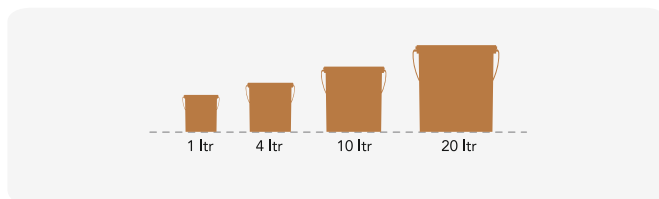

COVERAGE

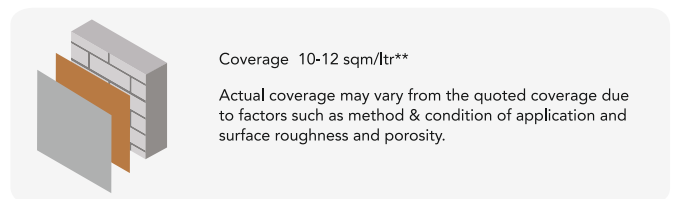

AREAS OF APPLICATION



Wooden houses, wooden claddings, roof underlays, windows, shutters, doors, fences and garden furniture

HOW TO APPLY

SURFACE PREPARATION

Ensure that timber to be painted is clean and dry. Remove all wax, grease and oil by cleaning with thinner. Carry out sanding along the grain marks using fine sand paper. Dust off entire area to be painted. Fill surface imperfections like nail holes and cracks etc by suitable filler. Sand smooth surface using fine sand paper and dust off.

APPLICATION PROCESS

Stir the contents thoroughly before and during use. No primer is required before application of this product. Apply two or three uniform coats of Solid Oil Stain by convenient method of application.

Caution: Allow enough time for proper curing of paint film. Use only recommended thinner for dilution and cleaning.

ADDITIONAL INFORMATION

DRYING TIME



Gloss @ 60°:

Matt - 0 - 5 unit

Method of application: Brush and Spray.

Highly flammable, Dangerous goods class 3.2, Flash point 32°C, UN 1263, PG III. HAZCHEM 3[Y]E

RECOAT



SAFETY PRECAUTION

- > Do not apply when surface temperature is below 10°C.
- > Provide adequate ventilation during use.
- > Keep out of reach of children.
- > Check cross cut adhesion of old paint before repainting.
- > Under normal conditions a week's curing is required to develop full hardness & resistance properties.

SAFETY INFORMATION

- > If swallowed give water to dilute. Do not induce vomiting. Get medical attention.
- > EYES: Hold open and flush with running water for at least 15 minutes.
- > Skin: Remove contaminated clothes and wash skin thoroughly with soap and water.
- > Inhalation: Remove to fresh air. If any symptoms persist, seek prompt medical attention.
- > Thinner / Cleanup - Thinner 600/Mineral turps. Though product is designed to be applied undiluted by brush, up to 5% thinner can be used for ease of application. For spraying, up to 15% thinner required depending on climatic condition.