

# Timbercare Deck and Furniture oil

Deck and furniture oil is a tung oil enriched product which penetrates the timber easily and helps protect exterior timber furniture, timber structures and decks against weather.




## PRODUCT BENEFITS

- Fungus and Mould resistance
- Excellent water repellancy
- No cracking, peeling or blistering

## PRODUCT FEATURES

### AVAILABLE PACKS

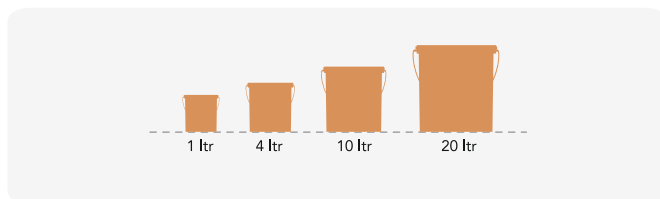

### COVERAGE

Coverage 8-10 sqm/ltr\*\*

Actual coverage may vary from the quoted coverage due to factors such as method & condition of application and surface roughness and porosity.

### AREAS OF APPLICATION



Timber walkways, outdoor stairs and steps, external cladding, roof underlays, shutters and garden furniture

## HOW TO APPLY

### SURFACE PREPARATION

Ensure that timber to be painted is clean and dry. Remove all wax, grease and oil by cleaning with thinner. Carry out sanding along the grain marks using fine sand paper. Dust off entire area to be painted. Fill surface imperfections like nail holes and cracks etc by suitable filler. Sand smooth surface using fine sand paper and dust off.

### APPLICATION PROCESS

Apply deck and furniture oil by brush or applicator. The first coat gets absorbed in the timber very fast. apply second coat after 24 hours. A third coat may be applied if required depending on type of wood. Wipe off excess oil with a clean cotton rag. Do not walk on the surface for 24 hours after the application of the final coat

## ADDITIONAL INFORMATION

### DRYING TIME

TOUCH DRY **5** MINUTE

### RECOAT

**2 hours** Recoat

Method of application: Brush or applicator

Highly flammable, Dangerous goods class 3.2, Flash point 32°C, UN 1263, PG III. HAZCHEM 3[Y]E

## SAFETY PRECAUTION

---

- > Do not apply when surface temperature is below 10°C.
- > Provide adequate ventilation during use.
- > Keep out of reach of children.
- > Check cross cut adhesion of old paint before repainting.
- > Under normal conditions a week's curing is required to develop full hardness & resistance properties.

## SAFETY INFORMATION

---

- > If swallowed give water to dilute. Do not induce vomiting. Get medical attention.
- > EYES: Hold open and flush with running water for at least 15 minutes.
- > Skin: Remove contaminated clothes and wash skin thoroughly with soap and water.
- > Inhalation: Remove to fresh air. If any symptoms persist, seek prompt medical attention.
- > Thinner / Cleanup - Mineral turps.